

Accessori Accessories**Grilli a omega**

Per celle di carico e dinamometri applicati in trazione.

Materiale: Acciaio temprato ad alto carico

Coefficiente di sicurezza 5

Bow shackles


For load cells and dynamometers working in tension.

Material: high tensile tempered steel

Safety coefficient 5

Dimensioni Dimensions

[mm]

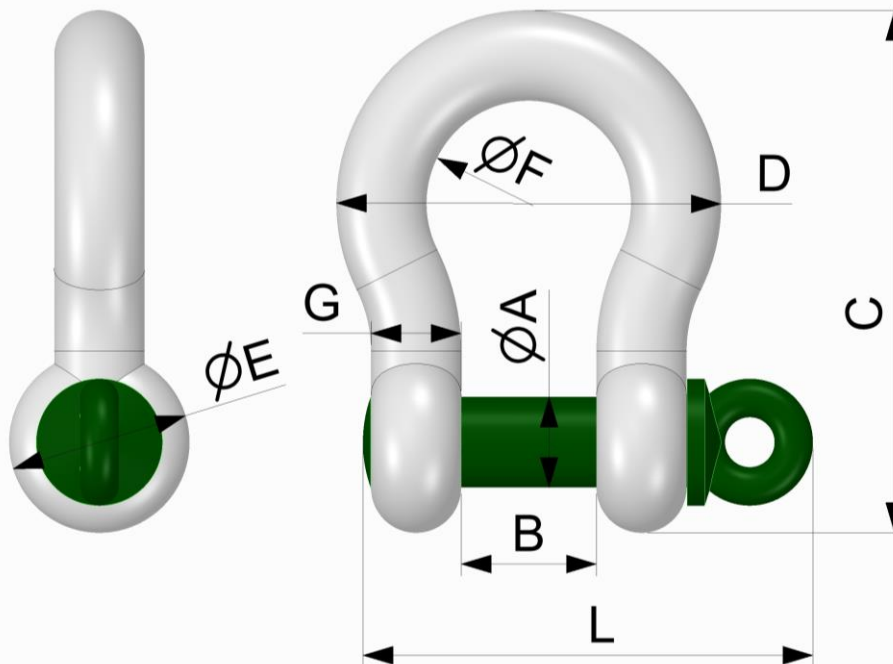

CODICE CODE	DINAMOMETRI /CELLE DYNAMOMETERS/CELLS	PORTATA WLL (t)	ØA	B	C	D	ØE	ØF	G	L
CGP412T	GR5B 0.5t - 1t	2	16	22	91	63	34	32	13.5	76
CGP416.5T	GR5B 3t - 6.5t	6.5	25	36	157	107	53	58	22	123
CGP419.5T	GR5B 9.5t, T20 5t - 7.5t - 10t	9.5	32	47	197	137	67	75	28	158
CGP4117T	T20 15t - 20t*	17	42	60	262	183	89	99	38	208
CGRILLOD1002030T	D200 20t - 30t	35	57	83	358	250	119	138	50	281
CGRILLOD10050T	D200 50t	55	70	105	463	329	145	185	65	355

*I grilli non possono essere forniti con coefficiente di sicurezza 5 per la portata 20t /
Shackles can't be supplied with security coefficient 5 for 20t load

Dasa-Rägister
EN ISO 9001:2015
IQ-1100-01

ACCREDIA
ENTE ITALIANO DI ACCREDITAMENTO

LAT N° 093
Calibration Centre
The products are NOT
covered by accreditation

ATEX Ex

Production Quality
Assurance Certified n°
TÜV CY 17 ATEX 0205891 Q

41126 Cognento (MODENA) Italy Via Bottego 33/A Tel:+39-(0)59-346441 Fax:+39-(0)59-346437 E-mail: aep@aep.it

Al fine di migliorare le prestazioni tecniche del prodotto, la società si riserva di apportare variazioni senza preavviso.
In order to improve the technical performances of the product, the company reserves the right to make any change without notice.